

BEST's Large Bore Manifold has fewer connections for faster rig-up time and higher flow rates. Our quick-change, plug and play configuration reduces downtime.




PRODUCT FEATURES:

- Modular System.
- Configurable for 16 to 24 ports.
- 7-inch main bore utilizing stand API BX 156 flange connections.
- Available instrumentation skid with 7-inch Check Valve and 7-inch Isolation Vavles.
- Compact 4-port skids.

PRODUCT BENEFITS:

- Robust structural members to withstand and dampen vibration during operations.
- Polymer iron supports to alleviate stress due to vibration cycles from pumps.
- Utilizes 3-inch Clamp Hub iron to eliminate union failures.

SPECIFICATIONS

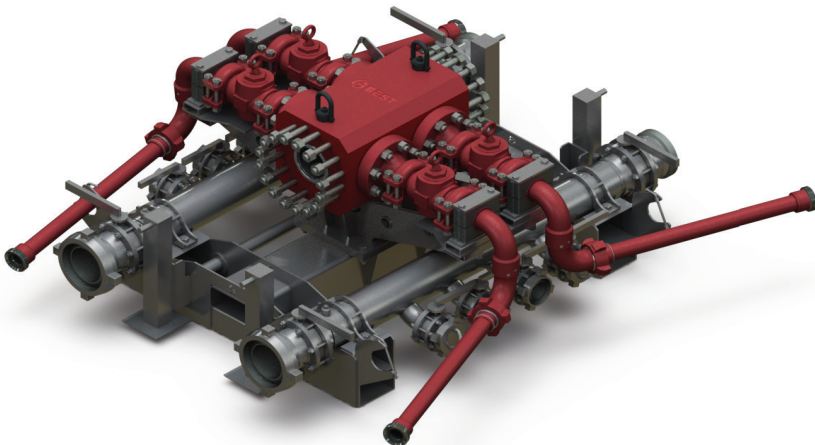

Working Pressure:	15,000 psi
Nominal Bore Size:	7.06 "
Branch Iron Nominal Size:	3 "
Max Flow Rate:	123 BBL/MIN
Max Operating Temperature:	250°F